



INSTALLATION INSTRUCTIONS

Chandeliers & Pendants

WARNING:

1. Installation of this hardwired fixture should be performed by a qualified electrician.
2. Due to risk of electrical shock, be certain that the electrical supply circuit to the fixture is turned off at the main fuse or circuit breaker before attempting any installation procedure.
3. This fixture is in compliance with UL requirements. Any tampering will void UL certification.
4. Do not exceed the maximum wattage rating.
5. Before beginning assembly, please read and follow each step in these instructions.

Parts:


- 1x Black Positive Wire
- 1x White Negative Wire
- 1x Green/Silver Ground Wire
- 2x Hex Nuts (A)
- 1x Mounting Bracket (B)
- 2x Junction Box Screws (C)
- 1x Threaded Post (D)
- 1x Canopy (E)
- 1x Securing Ring (F)
- 1x Hanging Ring (G)
- 2x Adjustable Links (H)
- 1x 6' Chain (I)

Installation:

1. Shut off the power at the circuit breaker before attempting installation.
2. Complete assembly of the fixture as directed by the Assembly Instructions included.
3. Determine desired length of Chain (I) and remove excess by separating one link using pliers. Remove and discard excess chain.
4. Connect the bottom of the Chain (I) to the fixture using 1 Adjustable Link (H).
5. Thread wire through the Chain (I) every 3 links, and then through the Hanging Ring (G), Securing Ring (F), and Canopy (E).
6. Assemble the Threaded Post (D) through the Mounting Bracket (B) by securing 2 Hex Nuts (A) on the top and bottom sides of the Mounting Bracket (B), holding the Threaded Post (D) securely in place.
7. Thread the fixture wires through the Threaded Post (D), and connect to the building wires as shown in Fig. 2. Tuck the wires inside the junction box.

(continued on next page)

Fig. 1

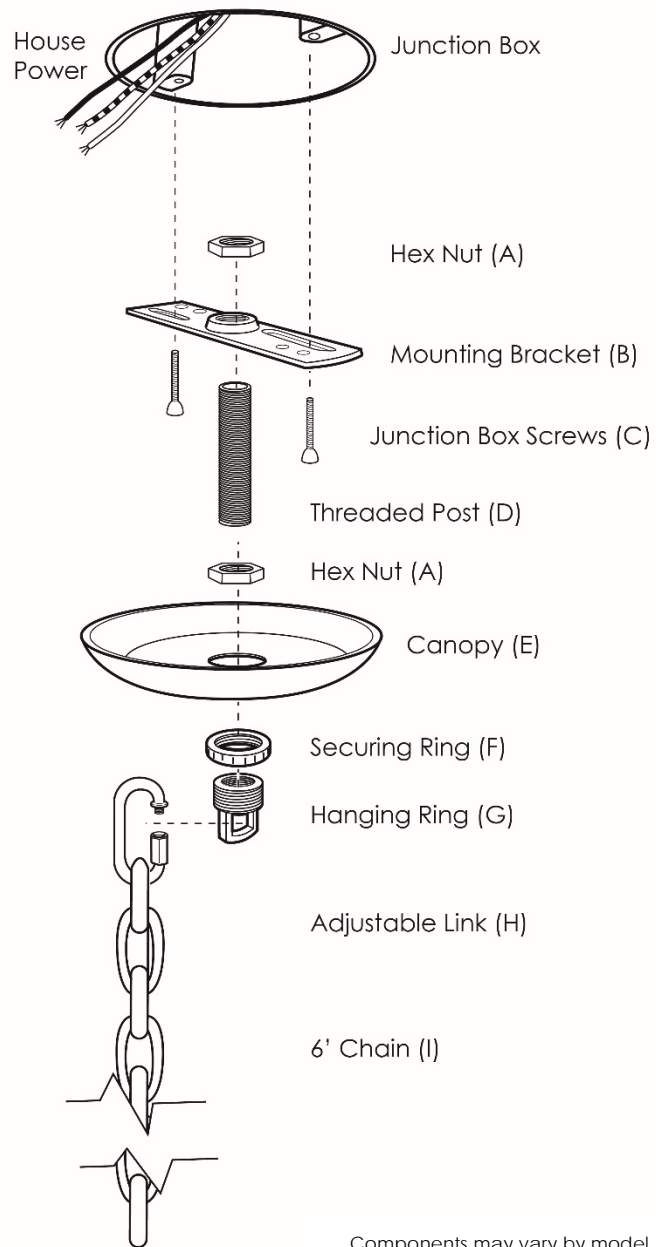

Components may vary by model

8. Attach the Mounting Bracket (B) to the Junction Box using the Junction Box Screws (C) provided.

9. Slide the Canopy (E) over the Threaded Post (D) and secure by screwing on the Hanging Ring (G) and Securing Ring (F) to tighten the Canopy (E) flush to the ceiling.

10. Attach the top end of the Chain (I) to the Hanging Ring (G) using 1 Adjustable Link (H) and allow the fixture to hang.

11. Install lightbulbs. (Not included)

12. Restore power at the circuit breaker and test the fixture.

Installation is complete.

Fig. 2

